

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/049961 A1

(51) International Patent Classification⁷: **E21B 33/12**

(74) Agent: **AS BERGEN PATENTKONTOR**; Strandgaten 198, P.O. Box 1998, Nordnes, N-5817 Bergen (NO).

(21) International Application Number:
PCT/NO2004/000357

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
22 November 2004 (22.11.2004)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20035196 21 November 2003 (21.11.2003) NO


(71) Applicant (*for all designated States except US*): **TC PLUG TECHNOLOGY A.S.** [NO/NO]; Heiane 4, Postboks 14, N-5879 Nyborg (NO).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

(72) Inventor; and
(75) Inventor/Applicant (*for US only*): **SØRENSEN, Tore, Hassel** [NO/NO]; Kløve, N-5700 Voss (NO).

[Continued on next page]

(54) Title: **DEVICE OF A TEST PLUG**

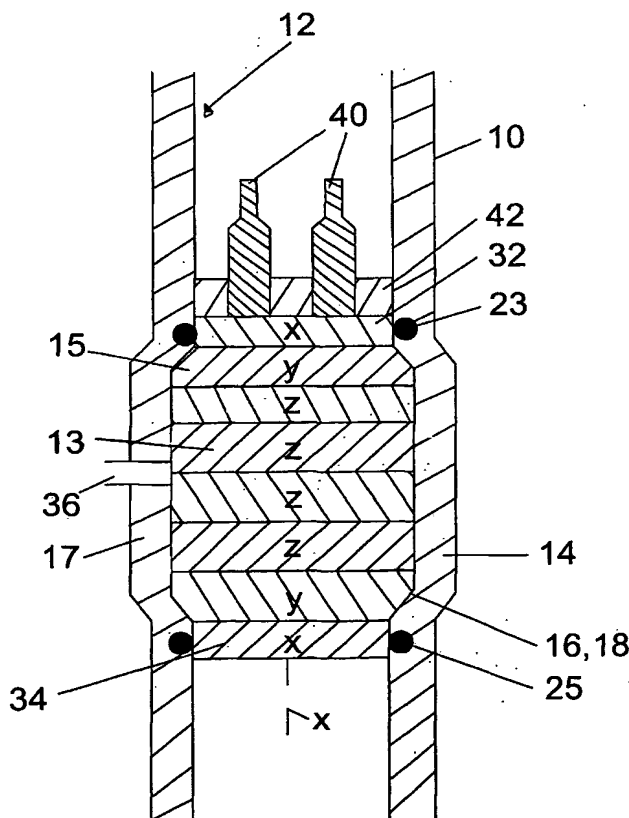

(57) Abstract: A device is described for a plug (12) for pressure testing of bore holes and the like in a formation or the like, and associated pipe (10) in which the plug is installed in a plug-carrying chamber (14), and the plug (12) seals the passage through the pipe by cooperating with sealing bodies (23, 25), with the underside of the plug (12) being arranged (rests) in a seat at the bottom of the chamber. The plug is characterised in that it comprises a number of layer-formed or tier-formed ring disc elements of a given thickness, on fitted on top of the other.

WO 2005/049961 A1



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*